


Yamaha Drive Power Kit

Model No. DPK-401

Installation can be easily accomplished and will take approximately 30 minutes to complete, with standard hand tools.

1. Remove the Drive Belt
2. Remove the bolt in center securing the rear secondary clutch
3. Slide the clutch assembly off shaft
4. Remove the snap ring and spring seat (MARKED A) **USE CAUTION – The spring is compressed!**
5. Replace the spring with the new power spring.
6. Replace the spring seat and compress spring
7. Reinstall the snap ring
8. Slide the clutch back on the shaft and reinstall the retaining bolt
9. Replace the drive belt

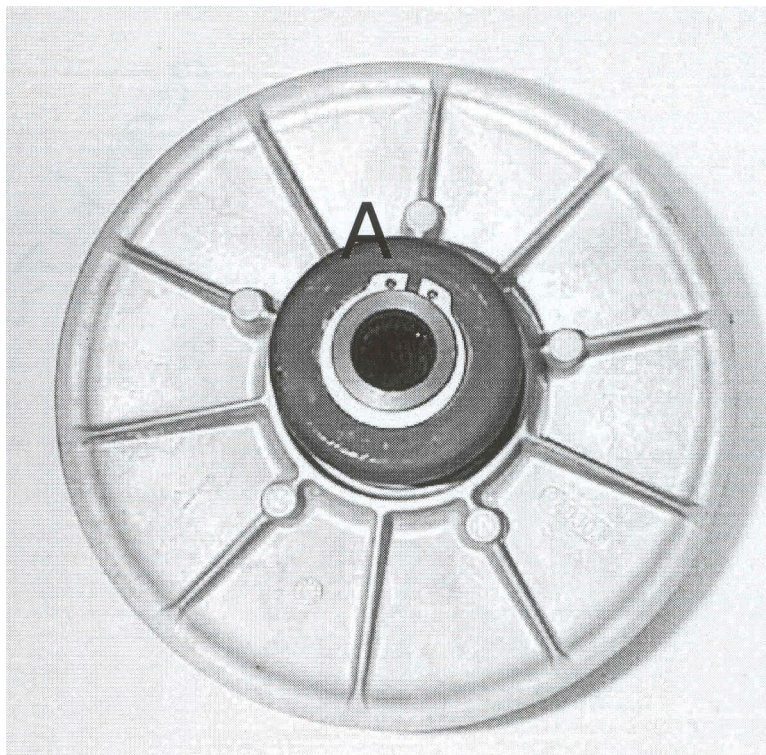

NEED MORE POWER?

Dixie Sales & Service can machine the face of your inner drive sheave. This will force your drive belt to stay tight, lowering your starting drive ratio. This provides a nice increase in take off power. Give us a call if you are interested.